




Your Replacement Battery Source

# BCH-1290F2

**Rechargeable Sealed Lead Acid Battery**  
High Rate Series

**(12V 9Ah)**

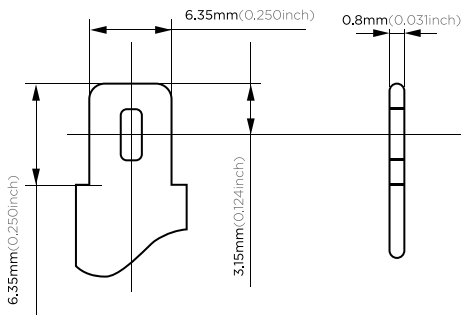


Terminal Dimensions

General Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for many commonly used applications. Special one-way valves allow excessive gases to escape but otherwise the battery is completely sealed and therefore maintenance-free, leak proof and usable in any position

## Application

- Alarm System
- Cable Television
- Communication Equipment
- Control Equipment
- Security System
- Medical Equipment
- UPS
- Emergency Power System
- Toys

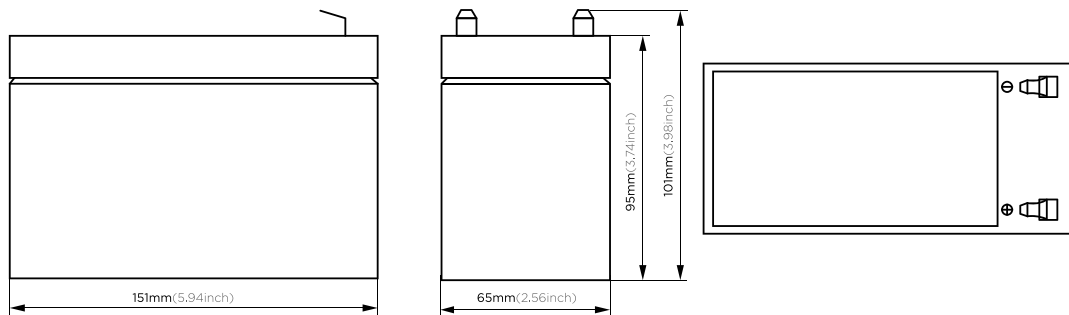

## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## General Features


- Superb high-rate discharge characteristics that ensure reliable performance in UPS applications.
- Sealed non-spillable maintenance free operation.
- Flexible installation in any position.
- ABS containers and covers (UL-94HB, UL94V0) optional.
- VRLA Absorbent Glass Mat (AGM) Technology guarantees safe operation without maintenance.
- Approved for transport by air. D.O.T., I.A.T.A. and F.A.A. certified.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self-discharge characteristics

## Performance Characteristics


<b>Designed Floating Life</b>	5 Years			
<b>Capacity (25°C)</b>	20HR(0.5A,1.75V)	10HR(0.95A,1.75V)	5HR(1.7A,1.75V)	1HR(6.3A,1.75V)
	9.2AH	9AH	8AH	6AH
<b>Dimensions</b>	Length	Width	Height	Total Height
	151mm(5.94inch)	65mm(2.56inch)	95mm(3.74inch)	101mm(3.78inch)
<b>Approx. Weight</b>	2.55kg(5.62lbs)			
<b>Internal Resistance</b>	Full charged at 25°C: 0.017 Ohm			
<b>Self Discharge</b>	3% of capacity declined per month at (25°C)			
<b>Capacity Affected by Temp. (20HR)</b>	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
<b>Charge Voltage (25°C)</b>	Cycle use		Float use	
	14.4-15V(-30mV/°C), max. Current: 2.7A		13.6-13.8V(-20mV/°C)	

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.  
Page 1 of 2


**Charge characteristic**

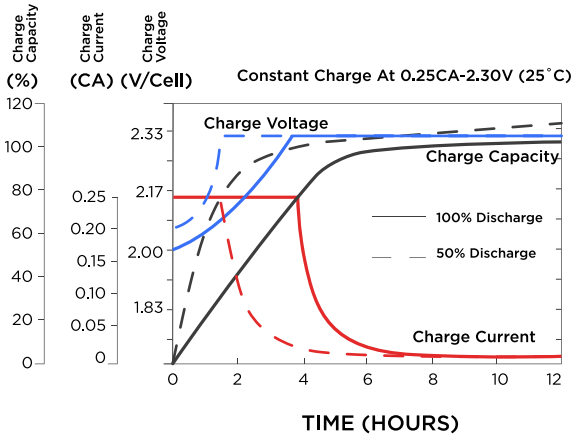


**Discharge characteristic (25°C)**

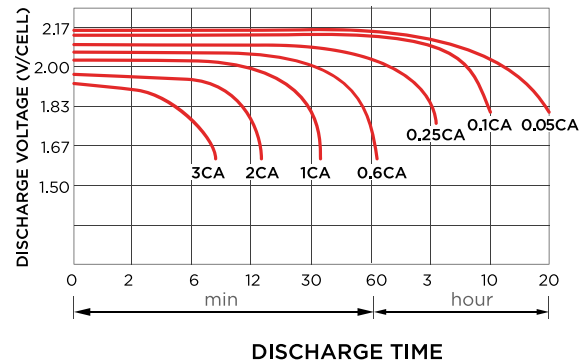

**Relationship of OCV and state of charge**

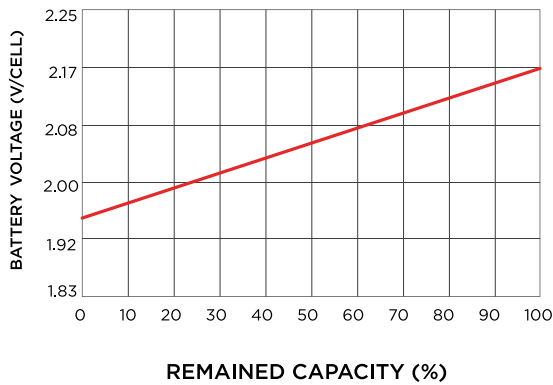

**Self-discharge characteristic**

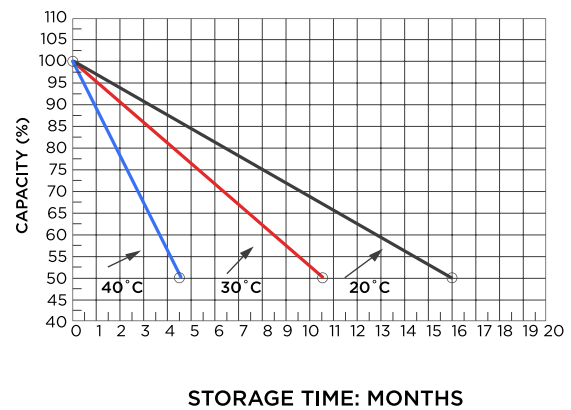

**Constant current discharge ratings-amperes at 77°F 25°C**

F. V / Time	5 min	10 min	15 min	30 min	1HR	3HR	5HR	10HR	20HR
1.60V	49.6	30.9	23.3	14.2	7.11	3.12	1.91	1.04	0.56
1.67V	46.6	29.3	22.4	13.6	7.01	3.00	1.87	1.03	0.54
1.70V	42.7	28.2	21.9	12.4	6.80	2.80	1.83	1.02	0.53
1.75V	41.8	27.4	21.2	11.7	6.48	2.71	1.79	1.02	0.52
1.80V	37.4	26.1	19.2	10.9	6.07	2.60	1.68	1.00	0.51
1.85V	33.0	24.9	17.3	10.0	5.65	2.51	1.57	0.99	0.49

**Constant power discharge ratings-watts at 77°F 25°C**

F. V / Time	5 min	10 min	15 min	30 min	1HR	3HR	5HR	10HR	20HR
1.60V	87.1	55.8	42.5	25.6	12.8	5.53	3.22	2.13	1.12
1.67V	84.0	54.4	42.0	25.1	12.7	5.36	3.21	2.12	1.08
1.70V	79.1	53.8	41.6	23.5	12.5	5.12	3.17	2.11	1.07
1.75V	79.6	53.6	41.3	22.8	12.3	5.00	3.14	2.08	1.04
1.80V	72.8	52.9	38.3	21.7	11.6	4.85	3.04	2.05	1.01
1.85V	66.1	50.1	34.7	20.3	10.9	4.71	2.94	2.03	0.97