

General Features

- Positive and negative plates in lead-calcium tin alloy.
- Superior energy density
- Operates at a low internal pressure.
- Gas Recombination.
- Low Self Discharge.
- Long Service Life.
- A recognized component of UL.
- Application specific designs.
- Six months shelf life at 20°C.
- Design life 10 years.





Dimensions


	Length	Width	Height	Total Height	Approx. Weight
SI Units	330mm	171mm	214mm	220mm	9Kg
English Units	13.0inch	6.74inch	8.43inch	8.66inch	63.93lbs

Performance Characteristics

- Nominal Voltage: 12V
- Number of cell: 6
- Nominal Capacity 77° F(25°C): 20 hour rate (5A, 10.8V) 100Ah
1 hour rate (65A, 9.6V) 65Ah
- Internal Resistance: Fully Charged battery 77° F(25°C) 5mΩ
- Self-Discharge: 3% of capacity declined per month at 20°C
- Operating Temperature Range Discharge -20~60°C Charge -10~60°C Storage -20~60°C
- Max. Discharge Current 77° F(25°C): 900A (5S)
- Short Circuit Current: 2100A
- Charge Methods: Constant Voltage Charge 77° F(25°C)
Cycle use: 14.4 ~ 14.7V Maximum charging current 25A
Standby use 13.6 ~ 13.8V

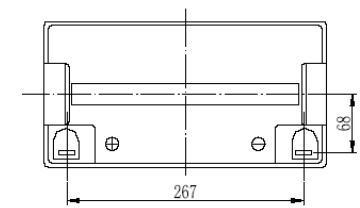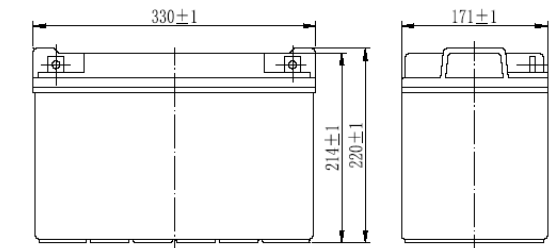

Connector Type: Dual Terminals - Auto Post and Stud(SAE/STUD)



Discharge Date

Constant Current Discharge Date(Amperes at 25°C)																							
End Voltage Per cell/V	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.60	231.0	190.0	155.0	130.0	112.0	98.5	89.5	81.5	75.5	70.0	65.0	47.0	38.0	31.5	27.5	21.7	18.3	15.8	14.0	12.4	11.3	10.2	5.25
1.65	220.0	182.0	149.0	125.5	108.0	95.0	86.4	78.7	72.9	67.6	62.8	45.3	36.6	30.3	26.5	21.0	17.8	15.4	13.7	12.1	11.1	10.1	5.20
1.70	208.0	173.0	142.0	120.5	103.5	91.2	83.1	75.8	70.2	65.1	60.5	43.5	35.1	29.0	25.5	20.2	17.2	14.9	13.3	11.8	10.9	10.0	5.15
1.75	196.0	164.0	135.0	115.0	98.7	87.2	79.6	72.8	67.4	62.5	58.2	41.8	33.6	27.7	24.4	19.4	16.6	14.4	12.9	11.4	10.6	9.8	5.10
1.80	183.0	154.0	127.0	109.0	93.7	82.7	75.8	69.6	64.4	59.7	55.7	40.0	32.0	26.3	23.2	18.5	15.9	13.8	12.4	11.0	10.3	9.5	5.00

Constant Power Discharge Date(Watts per cell at 25°C)																							
End Voltage Per cell/V	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	12h
1.60	395.0	315.0	260.0	225.0	200.0	180.0	165.0	152.0	140.0	131.0	124.0	87.5	70.5	59.0	52.0	43.0	37.0	31.3	27.6	24.6	22.3	20.8	17.0
1.65	379.0	305.0	251.0	217.0	193.0	174.0	160.0	147.0	136.0	128.0	121.0	85.0	68.5	57.5	51.0	42.2	36.4	30.8	27.2	24.3	22.1	20.6	16.9
1.70	362.0	293.0	241.0	208.0	185.0	167.0	154.0	142.0	132.0	124.0	118.0	82.0	66.0	55.5	49.8	41.3	35.7	30.2	26.7	23.9	21.8	20.4	16.8
1.75	344.0	281.0	230.0	198.0	177.0	160.0	148.0	136.0	127.0	120.0	114.0	79.0	63.5	53.5	48.5	40.3	35.0	29.6	26.2	23.5	21.5	20.2	16.6
1.80	324.0	267.0	218.0	187.0	168.0	151.0	140.0	129.0	121.0	115.0	109.0	75.7	60.9	51.3	47.0	39.0	34.1	28.8	25.6	23.0	21.1	19.9	16.4

