


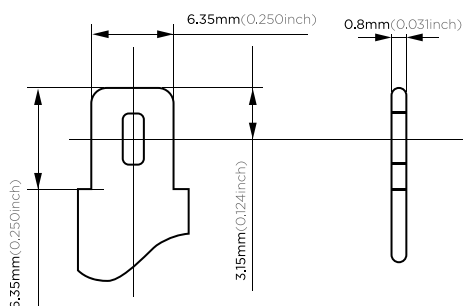

Your Replacement Battery Source


BCH-690F2
Rechargeable Sealed Lead Acid Battery
 High Rate Series
(6V 9Ah)

Terminal Dimensions

General Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for many commonly used applications. Special one-way valves allow excessive gases to escape but otherwise the battery is completely sealed and therefore maintenance-free, leak proof and usable in any position

Application

- Alarm System
- Cable Television
- Communication Equipment
- Control Equipment
- Security System
- Medical Equipment
- UPS
- Emergency Power System
- Toys

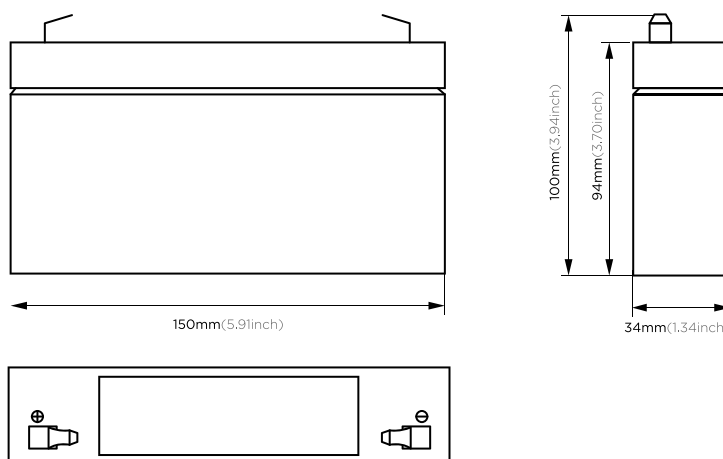

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features


- Superb high-rate discharge characteristics that ensure reliable performance in UPS applications.
- Sealed non-spillable maintenance free operation.
- Flexible installation in any position.
- ABS containers and covers (UL-94HB, UL94V0) optional.
- VRLA Absorbent Glass Mat (AGM) Technology guarantees safe operation without maintenance.
- Approved for transport by air. D.O.T., I.A.T.A. and F.A.A. certified.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self-discharge characteristics

Performance Characteristics


Designed Floating Life	5 Years			
Capacity (25°C)	20HR(0.5A,1.75V)	10HR(0.94A,1.75V)	5HR(1.6A,1.75V)	1HR(6.0A,1.75V)
	9.2AH	9.0AH	7.0AH	5.0AH
Dimensions	Length	Width	Height	Total Height
	150mm(5.91inch)	34mm(1.34inch)	94mm(3.7inch)	100mm(3.94inch)
Approx. Weight	1.2kg(2.64lbs)			
Internal Resistance	Full charged at 25°C: 0.014 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/°C), max. Current: 2.7A		6.8-6.9V(-10mV/°C)	

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.


Charge characteristic

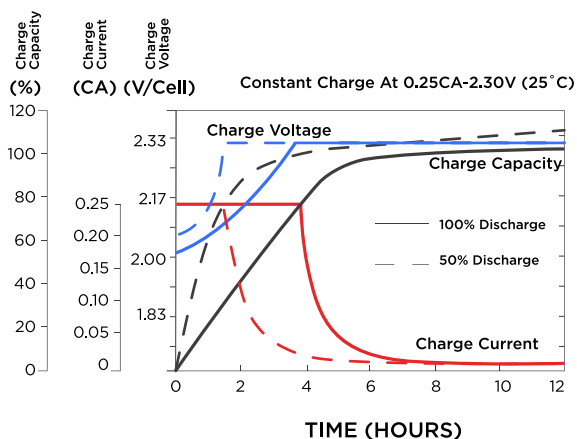


Discharge characteristic (25°C)

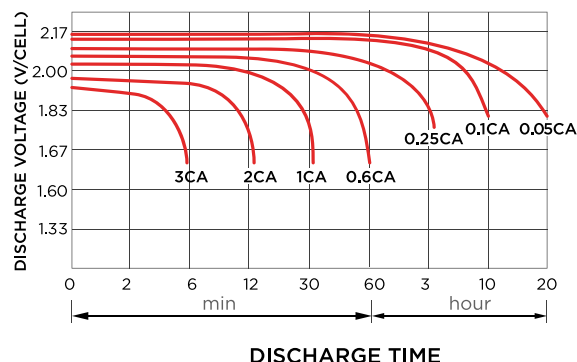

Relationship of OCV and state of charge

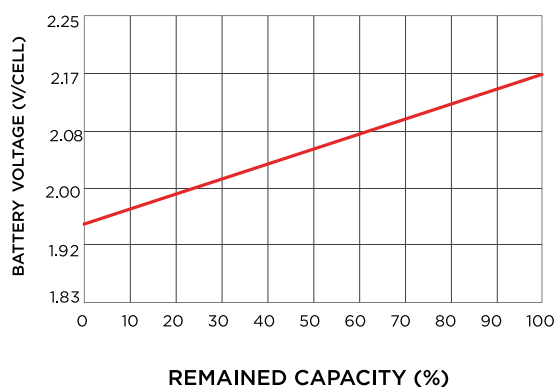

Self-discharge characteristic

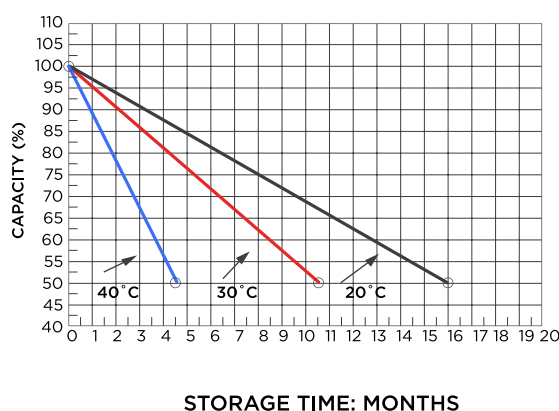

Constant current discharge ratings-amperes at 77°F 25°C

F. V / T ime	5 min	10 min	15 min	30 min	1HR	3HR	5HR	10HR	20HR
1.60V	42.5	26.5	20.0	12.2	6.40	2.81	1.72	0.93	0.51
1.67V	39.9	25.1	19.2	11.6	6.31	2.70	1.68	0.93	0.49
1.70V	36.6	24.2	18.8	10.6	6.12	2.52	1.64	0.92	0.48
1.75V	35.9	23.4	18.2	10.06	5.83	2.44	1.61	0.91	0.47
1.80V	32.1	22.4	16.5	9.32	5.46	2.34	1.51	0.90	0.45
1.85V	28.3	21.3	14.8	8.58	5.09	2.26	1.42	0.84	0.44

Constant power discharge ratings-watts at 77°F 25°C

F. V / T ime	5 min	10 min	15 min	30 min	1HR	3HR	5HR	10HR	20HR
1.60V	74.6	47.8	36.5	21.9	11.5	4.98	2.90	1.92	1.01
1.67V	72.0	46.6	36.0	21.5	11.5	4.82	2.89	1.91	0.97
1.70V	67.8	46.1	35.7	20.1	11.3	4.61	2.85	1.90	0.96
1.75V	68.2	46.0	35.4	19.5	11.06	4.50	2.83	1.85	0.94
1.80V	62.4	45.3	32.8	18.6	10.43	4.37	2.74	1.80	0.91
1.85V	56.6	43.0	29.8	17.4	9.80	4.24	2.65	1.75	0.88